


# WM 3 - G

## Water indicator

serial No. Date  
WM-GB- 706 07/11

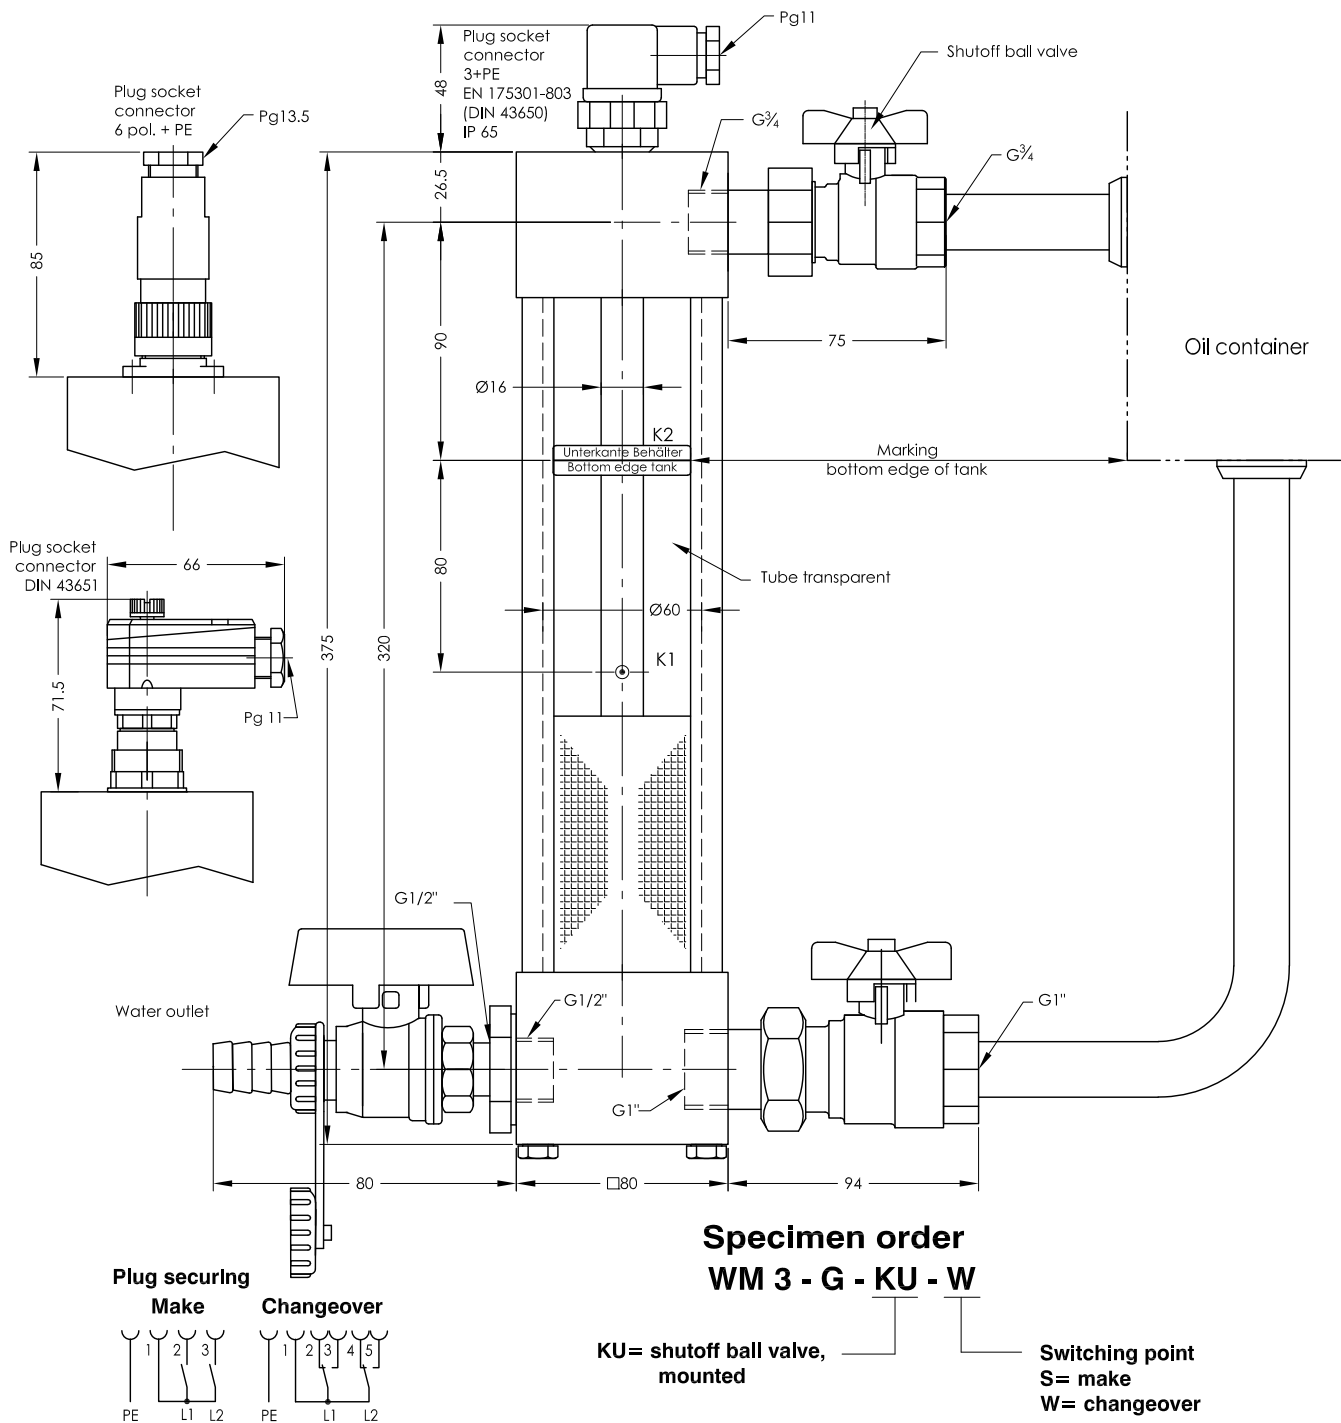

### Description

The water indicator is used for the control and regulation of all kinds of liquids and is primarily employed in hydraulic and lubrication oil appliances. This appliance functions according to the principle of separating layer measurement. When the water in the water indicator reaches a level of 250 ml the separating float starts floating and switching the contact K1 (warning). When the water reaches a level of 500 ml, switches contact K2.

A visual control through the transparent tube is also possible.

When mounting on the oil container take notice of the marking.

The device must only be installed by specialists.

### Technical data

|                       |   |
|-----------------------|---|
| Operating temperature | 80°C max.                                   |
| Operating pressure    | 3 bar max.                                  |
| Operating voltage     | 230V max.                                   |
| Current switched      | 1A max.                                     |
| Switching capacity    | 20 W/VA max.                                |
| Level contact         | Make / changeover                           |
| Plug socket connector | DIN 43651 or DIN 43650<br>or 6 pol.+PE IP65 |
| Connection            | Aluminium                                   |
| Shutoff valve         | Brass                                       |
| Mounting position     | vertical ± 30°                              |